


1. Check the fit of the diffuser to the bumper.
2. Use the screws to fix the diffuser to the bumper so that one mounting hole in the diffuser remains free.
3. There are holes in the diffuser for drilling holes in the bumper.
4. Pass the bolt through the drilled hole so that the head is facing the ground.
5. Tighten the bolt firmly with the nut.
6. Remove the screw from the next mounting hole in the diffuser and repeat steps 3 to 5.





7. Unscrew the vertical piece from the diffuser.

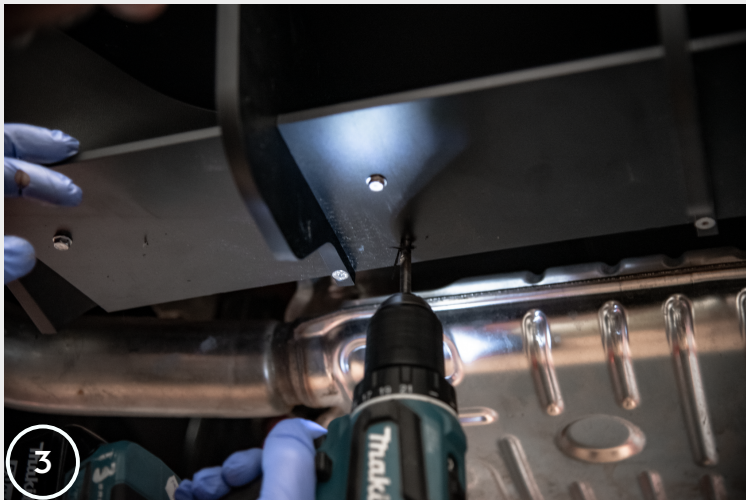

8. Remove the protection from the strap on the vertical element.

9. Thoroughly clean the surface of the bumper.



10. Slide the vertical piece into place and press it against the bumper.

11. Screw the vertical element to the diffuser from below. Then repeat steps 7-10 with the remaining vertical parts.

